

H I L I N E


PARISI
BATHWARE

DESIGN 

wall faced bidet
wall hung bidet



Manufactured by



3.68.0

January 2011

HI LINE

wall faced bidet
wall hung bidet

Hi Line is a collection of basins & WC's that possess high speed lines with swift and smooth surfaces.

Code: HIHI14

Tap Hole Options

1 tap hole only.

Trap Options

P - Trap.

Recommended for use with short inlet P-trap.

Waste Outlet

32mm overflow plug & waste to be ordered separately with tapware.

Overflow

Standard - positioned at the rear of bowl.

Colour

White only.

Fixings / Brackets


A pair of PVC floor fixing brackets are supplied as standard with the bidet. These are secured to the floor, which then enables the screws to be fixed to the brackets.

Installation Instructions

As access may be required to service the bidet mixer in the future, the bidet is unable to be installed using sand and cement. To do so will void the product warranty. Hygiene requires the bidet to be fitted with a pop up waste, which will be available from the selected bidet mixer manufacturer.

Packing Details

Pan 25kg. Supplied in 1 carton.

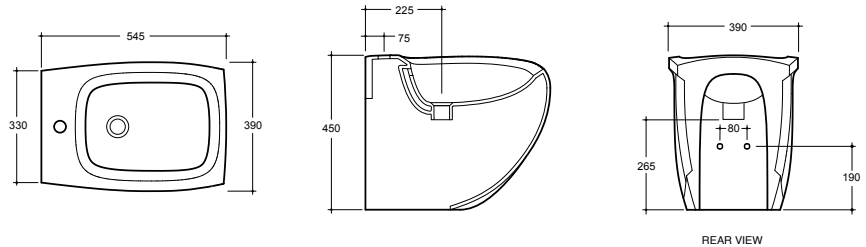

Hi Line is a collection of basins & WC's that possess high speed lines with swift and smooth surfaces.

Code: HIW14

Tap Hole Options

1 tap hole only.

Trap Options

P - Trap only.

Waste Outlet

40mm overflow plug & waste to be ordered separately with tapware..

Overflow

Standard - positioned at the rear of bowl.

Colour

White only.

Fixings / Brackets

A pair of L-shaped brackets that are fixed to both the wall and the floor surfaces are available. These are only suitable for use with brick or block walls. If the bidet is to be fixed to a stud wall a floor mounted chair bracket will be required.

For other installation requirements please contact Parisi Bathware for clarification.


Code: FL41/P (for use with brick or block walls).
SCB 011 (for use with stud walls only).

Installation Instructions

A pair of bidet brackets, that are provided as standard are to be used in conjunction with the preferred bracketing option outlined above. Refer to the rear elevation diagram for details on suggested P-trap and water connection point heights. Hygiene requires the bidet to be fitted with a pop up waste, which will be available from the selected bidet mixer manufacturer. It is recommended that the access width for (and including) the bidet be 850 - 900mm.

Packing Details

Pan 18kg. Supplied in 1 carton.

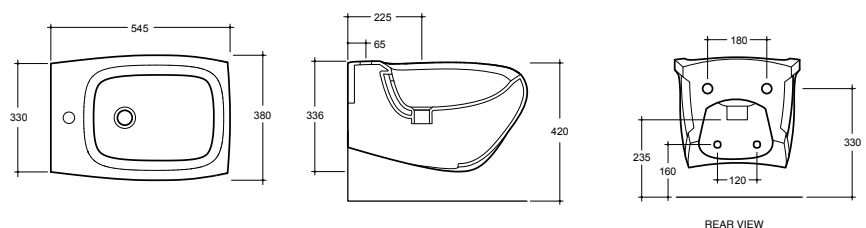

Manufactured by

